


Ultima® X Series Gas Monitors

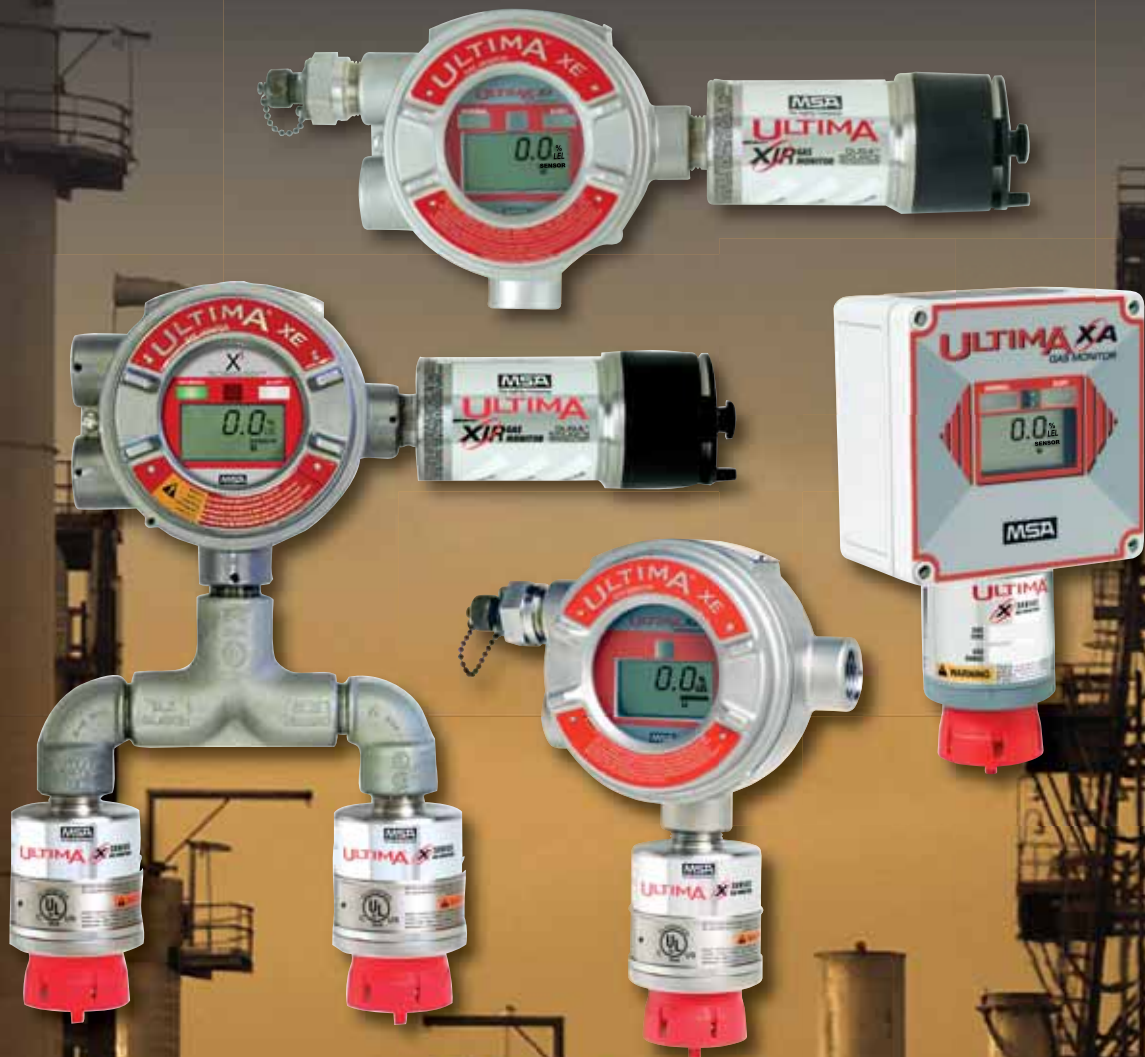

Versatile fixed instruments provide continuous monitoring of many hazardous gases using catalytic, electrochemical, and infrared gas detection methods. HART Protocol is now offered for improved asset management.

New features & EXtreme design, now with HART Protocol and DuraSource™ Technology.

MSA's Ultima X Series Gas Monitors, engineered using microprocessor-based technology and designed for varied gas detection needs, provide HART protocol. Ultima XIR and XI Gas Monitors offer DuraSource Technology, a new and improved light source providing extended sensor life.

HART Field Communications Protocol provides increased sensor data, part of cost-effective asset management. HART also provides convenient setup, calibration, and diagnostics. Calibrate, set up or perform diagnostics with HART from any point along the 4-20mA line. HART allows for existing component install and wiring to be used, reducing installation costs.



Ultima® X Series Gas Monitors

Ultimate Features. . . EXtreme Design



Ultima XE Gas Monitor – Explosion-Proof, Stainless Steel Gas Detector with Display

The Ultima XE Gas Monitor offers:

- 316 stainless steel
- Multiple-entry mounting enclosure
- Type 4X, IP66



Ultima XA Gas Monitor – Water- and Corrosion-Resistant, All-Purpose, Polycarbonate Gas Detector with Display

The Ultima XA Gas Monitor offers:

- Nema 4X rating
- Light weight (only 1.5 lbs)



Ultima XIR Gas Monitor – Explosion-Proof, Stainless Steel, Infrared Gas Detector with Display

The Ultima XIR Gas Monitor offers:

- 316 Stainless steel
- Multiple-entry mounting enclosure
- Fast response time
- Operation based on dual-wavelength, heated-optics technology, providing definitive compensation for temperature, humidity and aging effects
- IR technology which offers excellent long-term stability, eliminating the need for frequent calibrations
- A sintered-disk-free design for optimum performance in harsh environments
- No-gas calibration. Only a zero adjustment is required for full calibration.
- Type 4X, IP66

Ultima[®] X Series Gas Monitors

MSA's Ultima X Series Gas Monitors are microprocessor-based transmitters, engineered with the customer in mind.

Ultima X Series Gas Monitors, available in either stainless steel or polycarbonate enclosure housings, provide continuous monitoring of combustible and toxic gases, and oxygen deficiency. Installation is both simple and flexible. Ultima X Series Gas Monitors are suitable for indoor and outdoor applications in virtually any type of industry including offshore, refineries, chemical and petrochemical facilities, steel mills, water and wastewater plants, mining, and general industry.

Installation and Operation

Installation is both simple and flexible. Ultima X Series Gas Monitors:

- Operate in diffusion mode, with factory-calibrated sensors ready to perform immediately after installation
- Offer HART upgrade of existing units via replacement PCBA
- Are available for remote sensing applications, where installations require the sensor to be separated from electronics
- Can operate completely stand-alone with a large LCD display, optional quick-check LEDs and four relay outputs (three alarm and one fault), or connected with a standard 4-20mA output to a control system (PLC, DCS, etc)
- Have an adjustable full-scale range
- Provide for easy installation with the two-piece, field-wiring connectors

Calibration

As with all gas monitors, Ultima X Series Gas Monitors must be calibrated periodically with the gas of interest to ensure proper operation. The calibration process offers:

- Automatic adjustments
- Date stamping
- Calibration instructions displayed on monitor
- Selectable lockout of output signal during calibration
- Ability to calibrate at the installation location or remotely without systems interruption
- Accessory calibrator, controller, or pushbutton for calibration initiation

X Factors

- Patented sensor disconnect-under-power allows sensor change-out without declassifying a hazardous area
- Interchangeable smart sensors: pre-calibrated, installation-ready sensor modules, field-replaceable without tools
- New sensor type quick recognition and reconfiguration of alarm and relay settings
- LCD conveniently alternates between sensor reading and gas type plus scrolling messaging for ongoing diagnostic checks
- Single-board design for ultimate reliability and serviceability

Ultima XE Gas Monitors

- Explosionproof, 316 stainless steel gas detectors with display
- Multiple-entry mounting enclosure
- IP66-rated

Ultima XA Gas Monitors

- Water- and corrosion- resistant, all-purpose, polycarbonate gas detector with display
- NEMA 4X rating
- Lightweight (only 1.5 lbs)


Ultima XIR Gas Monitors

- DuraSource Technology for improved IR sensor life
- XIR/XI have extended warranty on IR sensors due to new and improved IR light source
- Explosion-proof, 316 stainless steel, infrared gas detector with display
- Multiple-entry mounting enclosure
- Dual-wavelength, heated-optics technology for temperature and humidity compensation, and anti-aging effects
- IR technology for long-term stability, infrequent calibrations, and fast response time
- Sintered disk-free design for optimum harsh environment performance
- No-gas calibration; zero adjustment sufficient for full calibration
- IP66-rated

With a number of new and exciting features, Ultima X Series Gas Monitors are suitable for indoor and outdoor applications in virtually any type of industry including offshore, refineries, chemical and petrochemical facilities, steel mills, water and wastewater plants, mining, and general industry.

Ultima X³® Technology

[X to the Power of 3]

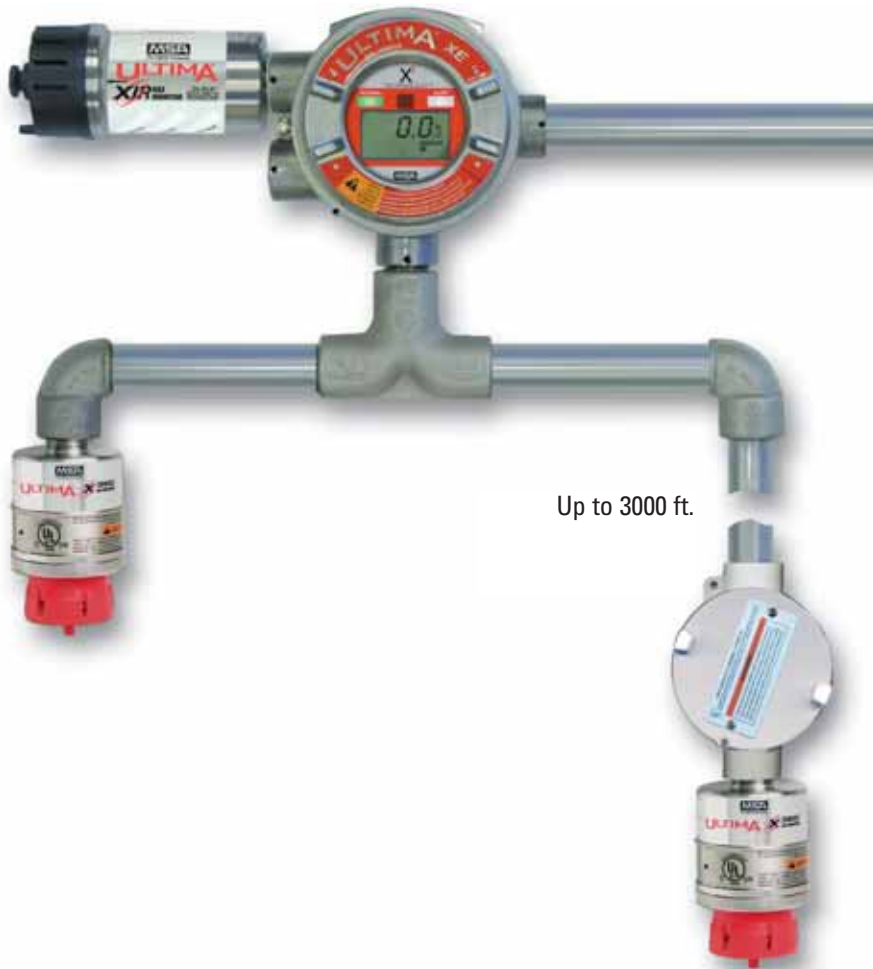

PLC/DCS [ProSoft-Tested]

Connect the X³ unit to PLC/DCS control systems. X³ technology is ProSoft-certified. It has been tested and found to be compatible with Allen-Bradley PLC/ModBUS connectivity by ProSoft Technology, Inc.

Ultima X³ Technology for Ultima X Series Gas Monitors features:

- **Multi-sensing**
 - Up to 31 monitors with up to 3 sensors inputted per monitor for 93-sensor total
 - Combination of electrochemical-, catalytic-, and infrared-type sensors is available
 - Scrolling display – monitor scrolls through type and reading for all attached sensors
 - Operation of monitor as network slave device
- **Signal boost**
 - Each sensor is remotely observable up-to 3000ft. from the monitor
 - Universal 85-256VAC or 8-30VDC power supply available at remote conduit
- **ModBUS RTU output**
 - Industry-standard format
 - RS-485 half-duplex communication interface
 - PLC/DCS systems integration

Accessories

Power Supply

Ultima X Series external power supply can power sensors remotely; one remote power supply module can power:

- up to 5 electrochemical or oxygen sensors
- up to 3 combustibles sensors
- internal power supply option also available



Pushbutton

Pushbutton feature lets users view various functions without calibrator:

- alarm acknowledge
- zero calibration initialization
- SPAN calibration initialization
- iCAL calibration initialization
- calibration abort



Duct-Mount Kit

Duct-mount Kit allows the user to monitor air within ductwork using the Ultima XE, XA or XIR sensor. Quick-disconnect fitting enables calibration gas to reach sensors without duct-mounted sensor removal.



Pump

Sampling pumps bring remote samples to sensors. Sampling modules are available in GP and XP versions of aspirated and pumped modules.



Calibrator

Ultima Monitor Calibrator offers the industry's simplest calibration method, a three-button device allowing Ultima X Series calibration and address changes.



Controller

Ultima Monitor Controller provides complete access to all features through its full-function keypad: alarm level set, span gas value changes, and last calibration date display.



HART Port

Intrinsically safe connection for a HART communicator.



