


Products you can trust.
Training you can use.
Engineered Services you can depend on.



The FP5K™ Tie-Back Shock Absorbing Lanyard

[A Tie-Back Lanyard that goes the distance]

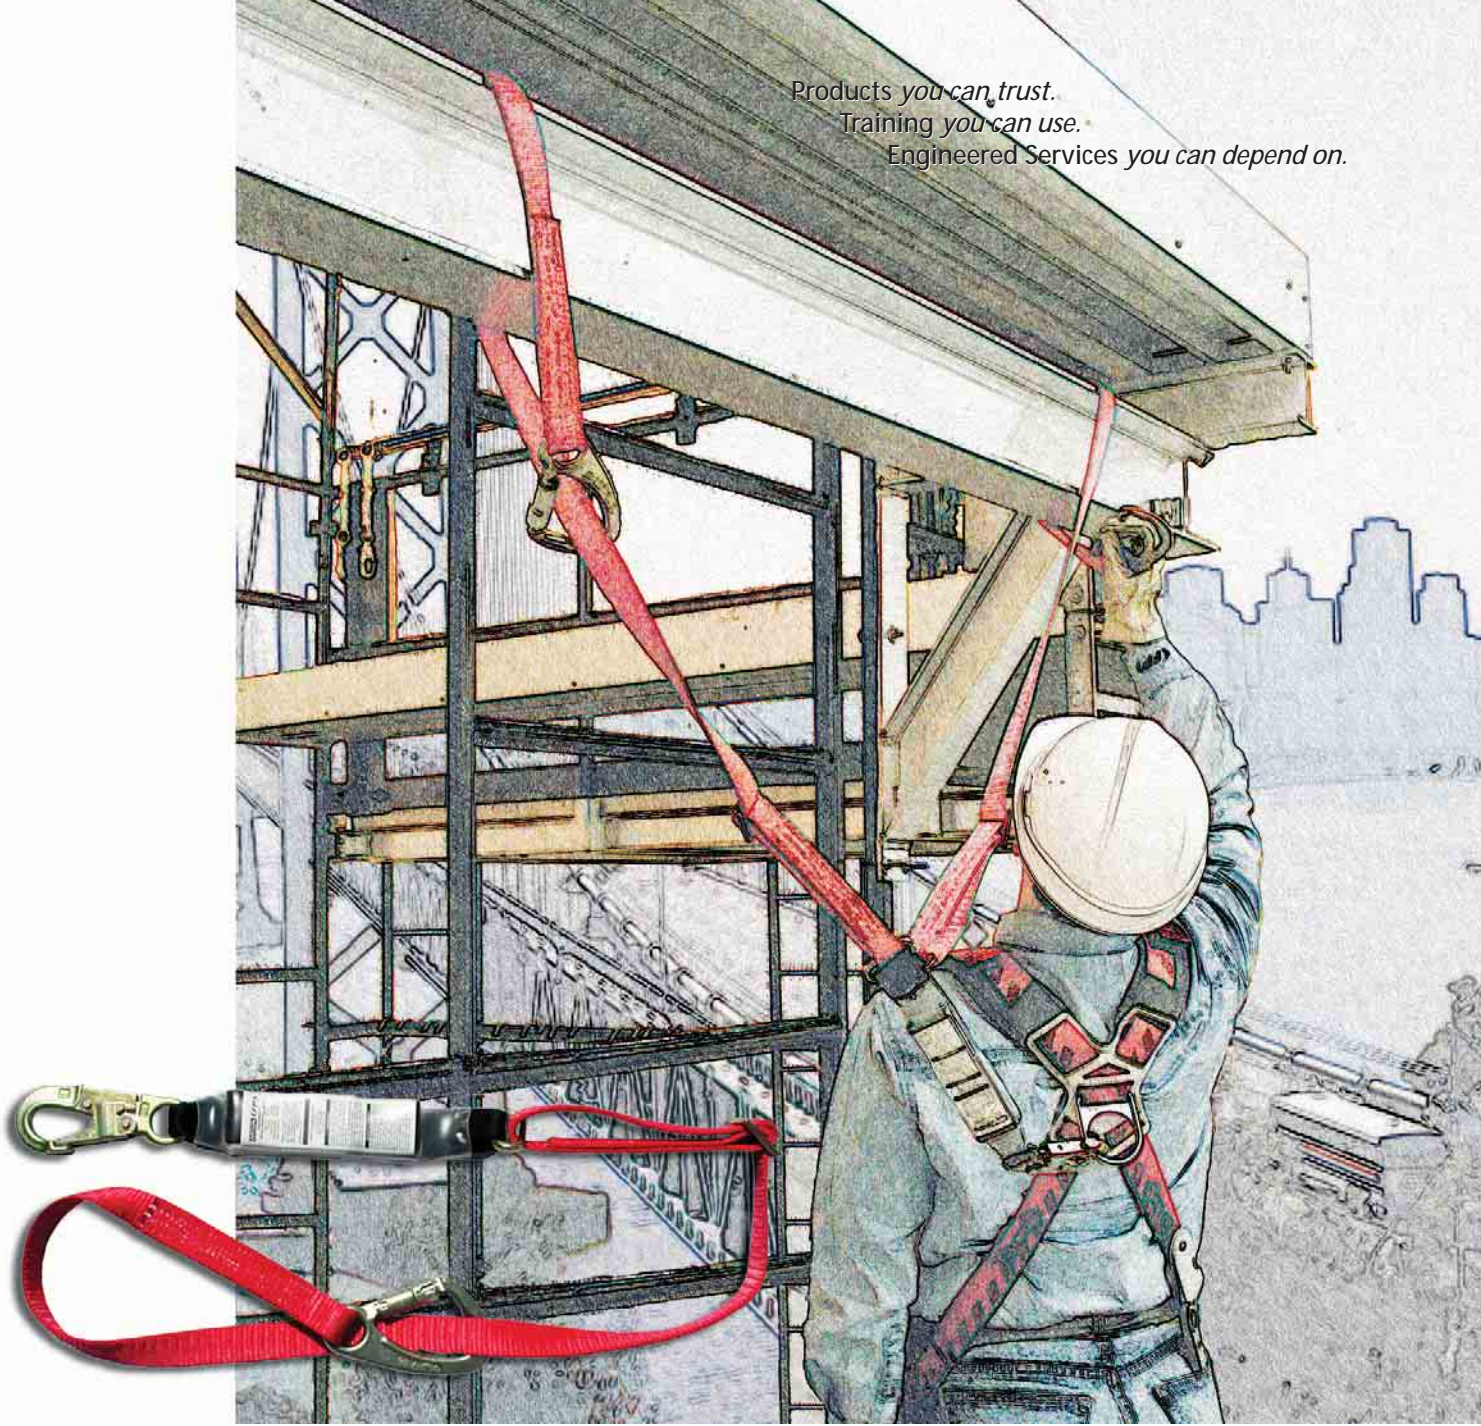

The FP5K Tie-Back Lanyard


- Uses the FP5K Carabiner, a new Tie-back lanyard connector
 - ➔ 5000 pound gate strength in any direction allows the FP5K Carabiner to be tied back directly to the lanyard
 - ➔ Unique carabiner body shape helps avoid confusion with standard connectors not designed for tie-back applications
 - ➔ FP5K carabiner design allows for maximum clearance inside the body of the carabiner (1" Gate Opening)
- Available in web or cable version
- Web version utilizes Monster-Edge™ Webbing with 12,000 pound minimum breaking strength
 - ➔ Monster-Edge webbing is designed for increased abrasion resistance
 - ➔ Internal wear indicator consists of two yellow threads that, when visible, alert a user as to when the lanyard should be removed from service due to severe abrasion
- Utilizes the Sure-Stop Shock Absorber to keep fall arrest forces below 900 lbs
- Available in both single and twin leg configurations
- Meets OSHA regulations, ANSI A10.14, ANSI Z359.1, and CSA approval pending.



5000 pound gate strength in any direction.

Specially designed safety recess inside the body of the carabiner provides a place for the lanyard to rest when tied back.


Section of Monster Edge Webbing



Internal wear indicator.

FP5K Carabiner

The outer side of the gate has a knurled surface to provide a secure grip on the gate when opening. The inner side of the gate has flattened edges to keep lanyard/gate contact at a minimum.

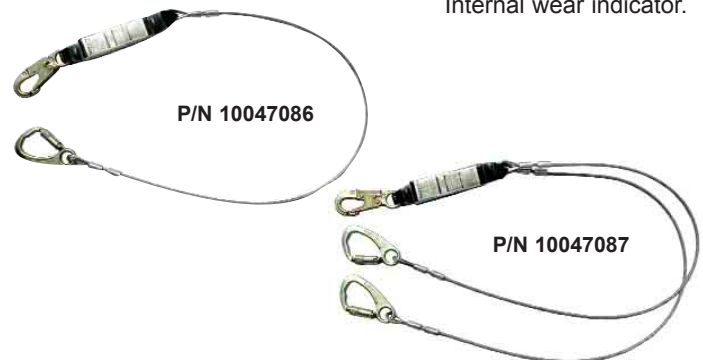

Ordering Information

Part No.	Description
10047084	FP5K Tie-Back Lanyard, Nylon Web, 6' Adjustable Length, with HL2000 snaphook on one end and FP5K Carabiner on the other end.
10047085	Twin Leg FP5K Tie-Back Lanyard, Nylon Web, 6' Adjustable Length, with HL2000 snaphook in center (attaches to back D-ring) and FP5K Carabiners on each leg.
10047086	FP5K Tie-Back Lanyard, Cable, 6' Fixed Length, with HL2000 snaphook on one end and FP5K Carabiner on the other end.
10047087	Twin Leg FP5K Tie-Back Lanyard, Cable, 6' Fixed Length, with HL2000 snaphook in center (attaches to back D-ring) and FP5K Carabiners on each leg.

Note: This Bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only they contain the complete and detailed information concerning proper use and care of these products.



Corporate Headquarters
 P.O. Box 426, Pittsburgh, PA 15230 USA
 Phone 412-967-3000
 www.MSAnet.com
 U.S. Customer Service Center
 Phone 1-800-MSA-2222
 Fax 1-800-967-0398
 MSA Canada
 Phone 1-800-MSA-2222
 Fax 905-238-4151
 Warehouse locations: Edmonton and Toronto
 MSA Mexico
 Phone 52 (2) 1 22 57 30
 Fax 52 (5) 3 59 43 30
 MSA International
 Phone 412-967-3354
 Fax 412-967-3451

Offices and representatives worldwide
 For further information:

