



APTURA™ LT30 Self-Retracting Lanyard

[Advanced Performance Technology] 



APTURA LT30 SELF-RETRACTING LANYARD


MSA has set a new standard in the mechanical fall protection market with the Aptura LT30 Self-Retracting Lanyard (SRL). With its solid design and fast-acting brake mechanism, you can be confident that the Aptura LT30 SRL will be there for you when you need it most. The Aptura LT30 SRL features include:

- **A durable, engineered high-impact thermoplastic housing** to increase service life.
- **Rugged, impact-absorbing protective bumpers** for added durability.
- **A field-replaceable lifeline option.** In the event that the webbing should become damaged, this option provides a field-replaceable web lifeline, eliminating costly returns to the manufacturer. The Aptura LT30 is the first 30' SRL on the market to offer this feature.
- **A lightweight design starting at 7.5 pounds,** making it one of the lightest 30' SRL's on the market
- **A standard lifeline length of 30'.** Available in lengths from 13' to 30' in 1' increments
- **A 400 pound working capacity** as a standard feature.
- **No annual factory re-certification** required due to high-quality construction. This not only reduces the cost of ownership, but also eliminates down time.
- **An integral load indicator** lets you know when it is time to remove the product from service.
- **SRL connector with integral swivel.**
- **Meets ANSI A10.14, ANSI Z359.1, and all applicable OSHA standards, and is CSA certified.**
- **ATO ordering flexibility** allows you to order the exact options, and only the options you want.

All these features and more combine to deliver the lightest weight, most versatile SRL available on the market today, the APTURA LT30 self-retracting lanyard.



SRL Connector Options

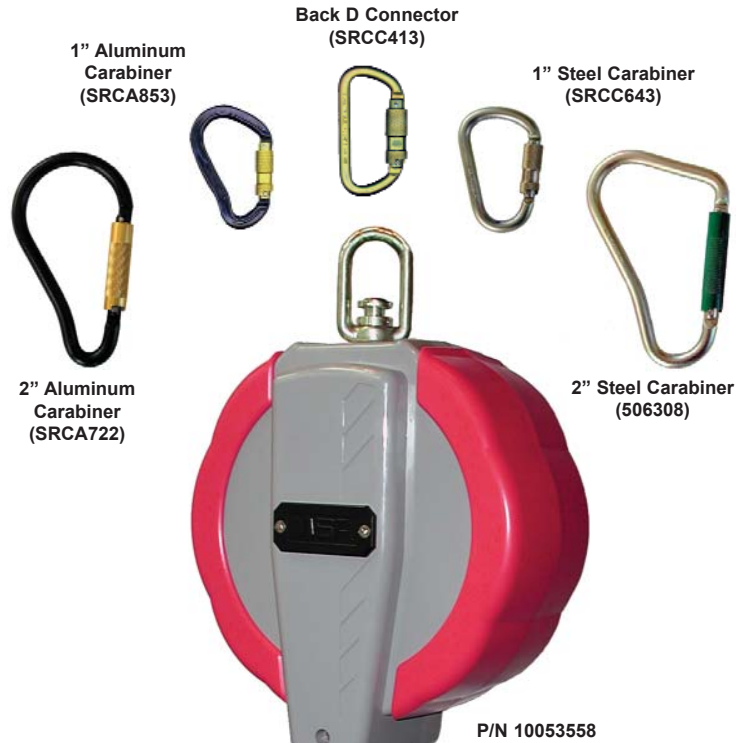

Lifeline Connector Options

ATO (Assemble To Order) Matrix for the APTURA™ SRL

Approval		Line Length		SRL Connector		Lifeline Connector		Field-Replaceable Lifeline	
N	Non CSA	01	6'	00	None	00	None (Sewn Loop)	0	No
	C CSA	02	7'	01	Back D-ring Connector	01	HL2000 Snap	1	Yes
03		8'	02	1" Aluminum Carabiner	02	Swivel HL2000 Snap			
04		9'	03	1" Steel Carabiner	03	RL20 Snap			
05		10'	04	2" Aluminum Carabiner	04	Swivel RL20 Snap			
06		11'	05	2" Steel Carabiner	05	LI Aluminum Snap			
07		12'			06	1" Steel Carabiner			
...					07	1" Aluminum Carabiner			
10		15'			08	1" Steel Swivel Carabiner			
...					09	LS Snap			
15		20'			10	AL64* Snap			
...					11	LS Swivel Snap			
20		25'							
...									
25		30'							



A-APT							
Part Number							Quantity

- ATO orders ready to ship in 2 - 5 days after receipt of order
- SRL's ordered using the ATO system are non-returnable
- Line lengths available from 6' to 30' in 1 foot increments
- If the CSA Approval Option is chosen, the APTURA SRL cannot be ordered in 11' or 12' lengths due to CSA requirements

APTURA LT30 SRL Ordering Information

Part No.	Line Length	SRL Connection	Lifeline Connection	Field Replacement Line
10050504	30'	None	LI Snap	Yes
10053558	30'	None	HL2000	Yes
10053559	30'	1" Steel Carabiner	LS Snap	Yes
10053560	30'	1" Steel Carabiner	HL2000	Yes

APTURA LT30 Lifeline Replacement Kits Ordering Information

Replacement kits include lifeline with nozzle, snap or carabiner per your order, line replacement cover, screw, hex wrench, and square wrench.

Part No.	Description
10054753	Replacement 30' lifeline with HL2000 Snap
10054754	Replacement 30' lifeline with HL2000 Swivel Snap
10054755	Replacement 30' lifeline with RL20 Snap
10054756	Replacement 30' lifeline with RL20 Swivel Snap
10054757	Replacement 30' lifeline with LI Snap
10054758	Replacement 30' lifeline with 1" Steel Carabiner
10054759	Replacement 30' lifeline with 1" Aluminum Carabiner
10054760	Replacement 30' lifeline with 1" Steel Swivel Carabiner
10054771	Replacement 30' lifeline with LS Snap
10054772	Replacement 30' lifeline with LS Swivel Snap
10054773	Replacement 30' lifeline with AL64 Snap
10054774	Replacement 30' lifeline with sewn loop



ADDITIONAL GREAT PRODUCTS FROM MSA

TechnaCurv™ Full Body Harness

The TechnaCurv Full Body Harness throws a curve to the ordinary harness with many new features never before seen in a full body harness:

- Curvilinear Comfort System
- Secure-Fit buckles
- Visco-Elastic Shoulder padding
- Sorbtek fabric on shoulder and sub-pelvic pads
- Variable width webbing to distribute weight over wider surface
- Teflon® coating to provide water, stain, and mildew resistance
- Innovative web design

In addition to the features above, the TechnaCurv harness is designed with downward adjusting torso straps on most models to ease adjustment. This is also the first harness on the market that allows you to order exactly the options you want, and only the options you want, through our Assemble-to-Order process. All these features combine to provide you with the most comfortable, versatile, unique, and safe harness available today.



TechnaCurv Harness
Part No.
A-NGHN111211103000

PointGuard™ Anchorage Connector Strap

The PointGuard Anchorage Connector provides a secure point of attachment for residential and concrete construction applications. The PointGuard Anchorage Connector can be installed in seconds, and when the anchorage connector is no longer needed a worker can simply cut the protruding strap and throw it away. The PointGuard Anchorage Connector is:

- Economical
- Available in 2 models
 - Residential Construction
 - Concrete Construction
- Durable
 - 1-3/4" Polyester Webbing
 - 5000 pound minimum breaking strength

PointGuard Concrete
Anchorage Connector Strap
Part No. 10042794



PointGuard
Residential
Anchorage
Connector Strap
Part No. 10042792

Designed to comply with all applicable OSHA regulations as well as ANSI A10.14 and ANSI Z359.1.

FP5K™ Tie-Back Lanyard

- Uses the FP5K Carabiner - with 5,000 lb gate strength in any direction allowing the carabiner to be tied back directly to the lanyard
- Available in web or cable version
- Web version utilizes Monster-Edge™ Webbing with 12,000 pound minimum breaking strength
- Utilizes the Sure-Stop Shock Absorber to keep fall arrest forces below 900 lbs
- Available in both single and twin leg configurations
- Meets OSHA regulations, ANSI A10.14 & ANSI Z359.1, and is CSA certified



FP5K Tie-Back Lanyard
Part No. 10047084

Note: This Bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only they contain the complete and detailed information concerning proper use and care of these products.



Corporate Headquarters
P.O. Box 426, Pittsburgh, PA 15230 USA
Phone 412-967-3000
www.MSAnet.com
U.S. Customer Service Center
Phone 1-800-MSA-2222
Fax 1-800-967-0398
MSA Canada
Phone 1-800-MSA-2222
Fax 905-238-4151
Warehouse locations: Edmonton and Toronto
MSA Mexico
Phone 52 (2) 1 22 57 30
Fax 52 (5) 3 59 43 30
MSA International
Phone 412-967-3354
Fax 412-967-3451

Offices and representatives worldwide
For further information:

