


Workman® Restraint Lanyard Product Specifications

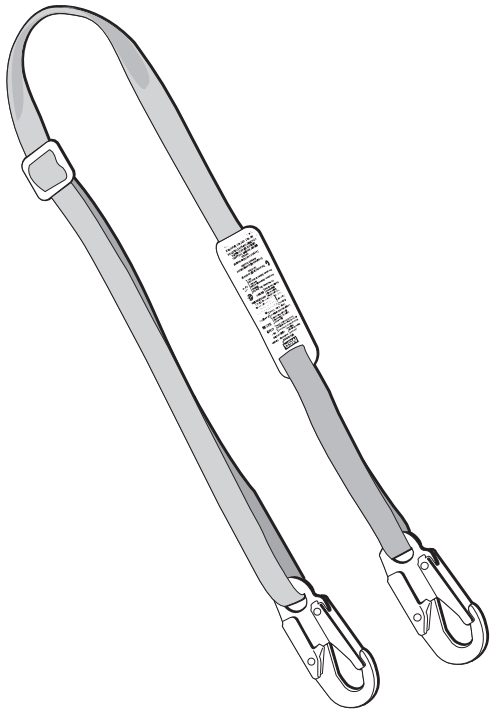

MATERIALS

Web:	1" (44 mm) nominal width, Polyester 8500 pound minimum breaking strength
Thread:	Polyester Box stitches: 3 cord thread
Connecting Hardware:	
Snaphook:	Zinc-plated, stamped-alloy steel 100% proof-tested to 3600 pounds (16kN) 5000 pound (22.2 kN) minimum breaking strength 3/4" (19mm) gate opening
Adjusting Hardware:	Zinc-plated, forged-alloy steel 5000 pound (22.2 kN) minimum breaking strength

TECHNICAL

Maximum Capacity	400 pounds (181 kg)
Standard Lanyard Length	6' adjustable

CERTIFICATION

OSHA:	1910.66 and 1926.502
ANSI:	A10.32
CSA:	Z259.11-05

Workman® Rebar Assembly Product Specifications

MATERIALS

Web:	1" (25 mm) nominal width Polyester 8500 pound minimum breaking strength
Thread:	Polyester Box stitches: 3 cord thread
Connecting Hardware:	
Snaphook:	Zinc-plated, stamped-alloy steel 100% proof tested to 3600 pounds (16 kN) 5000 pound (22.2 kN) minimum breaking strength 3/4" (19 mm) gate opening

TECHNICAL

Maximum Capacity:	400 pounds (181 kg)
Standard Lanyard Length:	28" bearing point to bearing point

CERTIFICATION

OSHA:	1910.66 and 1926.502
ANSI:	A10.32
CSA:	Z259.11-05

