



Industrial Air Cart provides air for up to four air-line respirators

The Industrial Air Cart permits up to 4 NIOSH approved air-line respirators to be connected to 2 one-hour 4,500 psig breathing apparatus cylinders (not included).

Features:

- Two-wheel poly powder-coated cart, two sets of double-cylinder straps, air-line hose rack and adjustable pull handle.
- A 5,500 psig pressure regulator reduces the 4,500 psig cylinder air to the proper air-line respirator inlet pressure.

- Low-pressure cylinder alarm whistle.
- An outlet pressure gauge operates in 0-125 psig range.
- Four-outlet manifold is available with 4 outlet fitting options.



Online interactive training with testing for the Industrial Air Cart, as well as other MSA products and applications, can be found at www.MSAnet.com/MSA-U.

MSA
The Safety Company

Cart Weight and Dimensions

SIZE: 35" H x 21" W x 15.25" D

UNIT WEIGHT: 38.5 pounds without cylinders

P/N	Description
10107537	Industrial Air Cart equipped with union adapters
10107779	Industrial Air Cart equipped with Snap-Tite Aluminum Quick Disconnects
10107780	Industrial Air Cart equipped with Foster Steel Quick Disconnects
10107811	Industrial Air Cart equipped with Hansen Brass Quick Disconnects




Industrial Cart Components

- 1 Pull pin for handle
- 2 Nylon cylinder strap
- 3 125 psig relief valve
- 4 Outlet connections
- 5 Regulator outlet pressure gauge
- 6 Pressure regulator
- 7 Cylinder manifold pressure gauge
- 8 Low-pressure alarm whistle
- 9 Pull pin for hose bracket
- 10 CGA 347 nut, hand-tightening

The Industrial Air Cart is sold without air cylinders. The MSA cylinders shown below can be used with the cart. A 60-minute cylinder will provide maximum air supply.

P/N	Description
807588	60-minute, H-60 carbon-wrapped cylinder
807570	45-minute, H-45 carbon-wrapped cylinder
807587	30-minute, H-30 carbon-wrapped cylinder

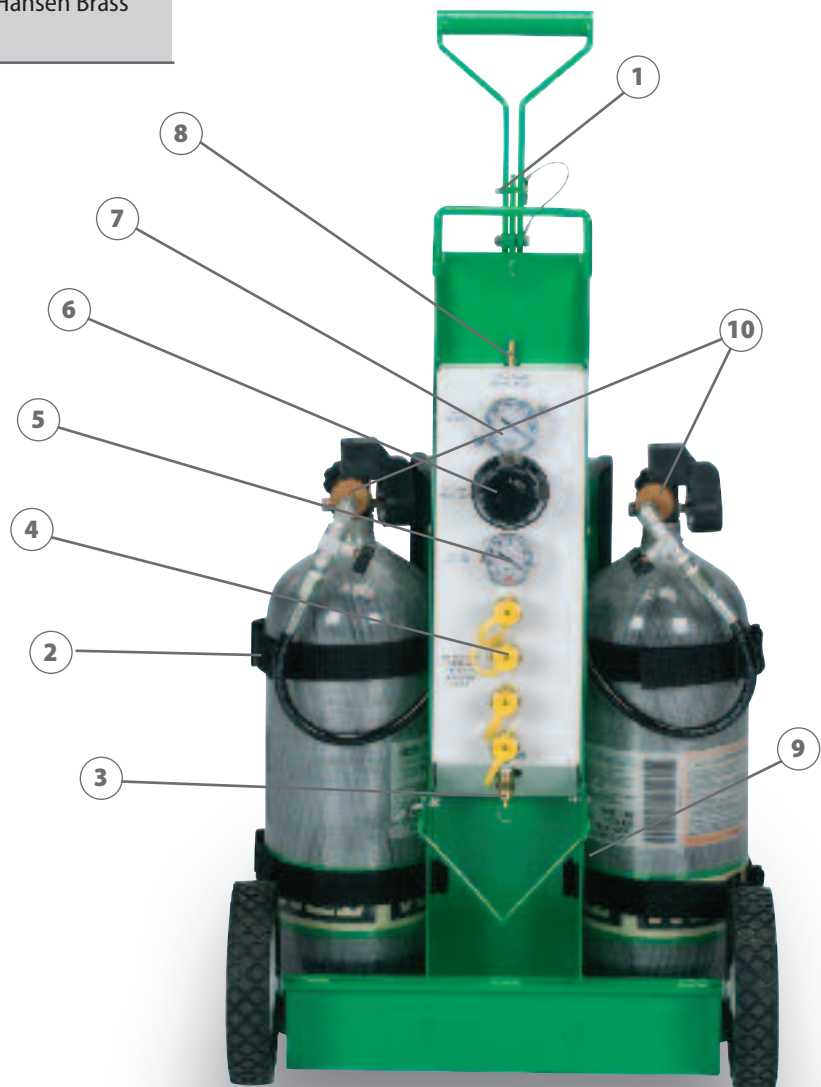

Note: This bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only they contain the complete and detailed information concerning proper use and care of these products.



ID 0114-28-MC / March 2010

© MSA 2010 Printed in U.S.A.

Corporate Headquarters
P.O. Box 426, Pittsburgh, PA 15230 USA
Phone 412-967-3000
www.MSAnet.com

U.S. Customer Service Center
Phone 1-800-MSA-2222
Fax 1-800-967-0398

MSA Canada
Phone 416-620-4225
Fax 416-620-9697

MSA Mexico
Phone 01 800 672 7222
Fax 52-44 2227 3943

MSA International
Phone 412-967-3354
FAX 412-967-3451

MSA
The Safety Company