


Mega Swivel 5K and 10K Steel and concrete Anchorage Connectors

Product Specifications

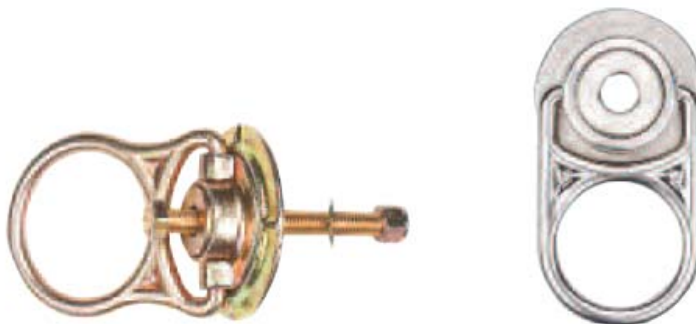

MATERIALS	
5K Mega Swivel	Zinc-plated steel
5K SST Mega Swivel	316 stainless steel
10K Mega Swivel	Zinc-plated steel

FALL ARREST SYSTEM	
Rotation	Shall have a 360 degree rotation
Flip	Shall be able to flip 180 degrees
Maximum Capacity	Anchorage to which personal fall arrest equipment is attached shall be capable of supporting at least 5,000 pounds (22.2kN) per user attached, or shall be designed, installed and used as part of a complete personal fall arrest system that maintains a safety factor of at least two under the supervision of a qualified person.
Fall arrest forces	Must not exceed 1,800 lbs (8kN)
Free fall distance	Must not exceed 6.0 ft (1.8m) in accordance with OSHA and ANSI Z359.1

APPROVALS	
5K Mega Swivel	ANSI Z359.1 (5,000 lbs / 22kN), OSHA 1910.66
5K SST Mega Swivel	ANSI Z359.1 (5,000 lbs / 22kN), OSHA 1910.66
10K Mega Swivel	ANSI Z359.1 (10,000 lbs / 44kN), OSHA 1910.66

ATTACHMENTS
When used as part of a personal fall arrest system, no more than one personal fall arrest system may be attached to the Anchorage Connector.

APPLICATIONS
Steel flanges or concrete substrate